

# 400 Series 404D-22TA Industrial Open Power Unit

46.2 kW / 62 hp

The Perkins 400D range has been developed in consultation with our market-place. This 2.2 litre, 4 cylinder, turbocharged engine complete with radiator cooled unit, complements the exciting 400 Series product line-up, offering customers a choice of ultra-compact, lightweight power units whilst maintaining all the customer benefits they can experience from other products in the range.

The 400 Series engine family continues to set new standards in the compact engine market. Developed alongside customers to fulfil their needs in the construction, materials handling, agricultural/turf, genset and compressor markets, it is another class-leading diesel range from Perkins.

Perkins IOPUs offer the advantages of an industrial engine, with the convenience of a cost effective cooling and filtration solution. This minimises machine development time and costs, and enables applications to be powered with ease.

The 404D-22TA IOPU is a powerful but quiet 2.2 litre packaged unit. It delivers impressive performance with low operating costs in a small, efficient package ideal for a range of industrial applications.



## Ultra-compact power

- Up to 46.2 kW (62 hp) from an engine envelope of 0.75 cubic metres (26.4 cubic ft)
- Easy installation

## Clean and quiet

- Noise levels have been kept to a minimum
- Subjective harshness has been carefully controlled making the engine sound even quieter

## Durable power

- Product design and process improvements enhance both engine reliability and durability
- A new improved (advanced) governor, valve seat inserts, and new compliance testing deliver reliability of 6,000 hours
- A standard two-year warranty demonstrates our confidence in durability and reliability of our engines

## Low operating costs

- Approved for operation on biodiesel\* concentrations of up to 20%
- Oil and filter changes are 500 hours, dependent on load factor

- Engine durability and reliability, the warranty offering, and ease of installation combine to drive down the cost of ownership.

## Product support

- With highly trained Perkins distributors in thousands of communities in over 180 countries, you are never far away from expert product knowledge, genuine parts and a range of advanced diagnostic technology for keeping your engine in peak condition
- **Warranties and Service Contracts**  
We provide one-year warranties for constant speed engines and two-year warranties for variable speed models, as standard. These are supported by multilevel Extended Service Contracts that can be bought additionally

Discover more

[www.perkins.com](http://www.perkins.com)

[www.perkins.com/esc](http://www.perkins.com/esc)

[www.perkins.com/distributor](http://www.perkins.com/distributor)

To find your local distributor

Performance Data	Maximum Power			Speed (rev/min)		
	Speed rpm	kW	hp	Nm	lbf.ft	Speed rpm
Net Intermittent	2800	46.2	62.0	195.0	143.8	1800
Net Continuous	2800	40.2	53.9	169.7	125.1	1800

\*Subject to conformance with ASTM D6751 and EN14214.

Photographs are for illustrative purposes only and may not reflect final specification.

All information in this document is substantially correct at time of printing and may be altered subsequently.


Publication No.PN1959/07/13 Produced in England ©2012 Perkins Engines Company Limited

 **Perkins**<sup>®</sup>

THE HEART OF EVERY GREAT MACHINE

# 400 Series 404D-22T Industrial Open Power Unit

46.2 kW / 62 hp

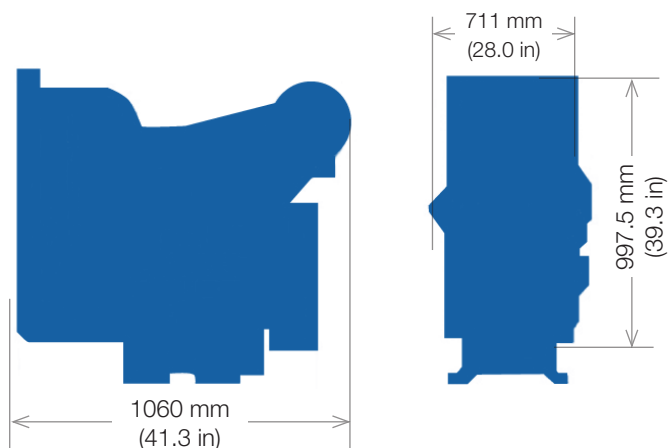

## Engine specification

- Cast iron engine block
- SAE flywheel size 190.5 mm (7½ in)
- SAE 4 flywheel housing
- Fuel injection pump
- Fuel filter
- Glow plug starting aid
- Lub oil sump
- Spin on lub oil filter
- Inlet manifold
- Cast iron exhaust manifold – vertical outlet/side outlet optional
- Coolant pump belt driven
- Mounted radiator and fan
- Mounted air cleaner
- Starter motor 12 volt
- Alternator 12 volt 65 amp
- ESOS (Electric shut-off solenoid)
- Lub oil pressure switch
- Coolant temperature switch

## Option groups

A selection of optional items is available to enable you to prepare a specification precisely matched to your needs.

## Engine data

Number of cylinders .....	4 in-line
Bore and stroke.....	84 x 100 mm (3.3 x 3.9 in)
Displacement .....	2.2 litres (135 cubic in)
Aspiration .....	Turbocharged and aftercooled
Cycle.....	4 stroke
Combustion system.....	Indirect injection
Compression ratio .....	23.3:1
Rotation.....	Anti-clockwise viewed on flywheel
Cooling system.....	Liquid
Total lubrication capacity.....	10.6 litres (2.8 US gals)
Total coolant capacity .....	11.7 litres (3.1 US gals)
Dimensions	
Length .....	1050 mm (41.3 in)
Width.....	711 mm (28.0 in)
Height.....	997.5 mm (39.3 in)
Dry weight .....	302 kg (665.8 lb)
Final weight and dimensions will depend on completed specification.	

Photographs are for illustrative purposes only and may not reflect final specification.

All information in this document is substantially correct at time of printing and may be altered subsequently.  
Publication No.PN1959/07/13 Produced in England ©2012  
Perkins Engines Company Limited

**Perkins Engines Company Limited**  
Peterborough PE1 5FQ  
United Kingdom  
Telephone +44 (0)1733 583000  
Fax +44 (0)1733 582240  
[www.perkins.com](http://www.perkins.com)

 **Perkins®**

THE HEART OF EVERY GREAT MACHINE