

1100 Series 1104D-E44T Industrial

74.5 kW / 99.9 hp

Compliant to EU Stage IIIA / EPA Tier 3 emissions, the Perkins® 1104D-E44T is the latest addition to the common platform concept of 1100 Series diesel engines.

This engine encompasses the advantages of the previous Tier 3 electronic engines in the Perkins range and adds a new world-class common rail fuel system. The new fuel system, with its class-leading filtration, delivers great benefits to customers and end users because of its tolerance to different standards of fuel quality.

Focusing on the common platform theme, changes to engine envelope dimensions and connection points have been kept to a minimum.



Specification		
Number of cylinders	4 in-line	
Bore and stroke	105 x 127 mm	4.13 x 5.0 in
Displacement	4.4 litres	269 in ³
Aspiration	Turbocharged	
Cycle	4 stroke	
Combustion system	Direct injection	
Compression ratio	16:2.1	
Rotation	Anti-clockwise, viewed on flywheel	
Total lubricating capacity	8 litres	2.1 US gal
Cooling system	Liquid	
Total coolant capacity	7 litres	1.8 US gal

www.perkins.com

Photographs are for illustrative purposes only and may not reflect final specification. All information in this document is substantially correct at time of printing and may be altered subsequently. Final weight and dimensions will depend on completed specification.

Publication No. PN3052/11/15 Produced in England ©2014 Perkins Engines Company Limited

 **Perkins®**

THE HEART OF EVERY GREAT MACHINE

1100 Series 1104D-E44T Industrial

74.5 kW / 99.9 hp

Features and benefits

Powered by your needs

- The Perkins 1104D-E44T delivers up to 74.5 kW (100 bhp) and over 420 Nm (310 lb·ft) of torque, providing greater productivity through an improved power to weight ratio
- The availability of a large range of build options, including a range of SAE 2 and 3 flywheel housings, enables the product to be tailored to specific customer needs

Worldwide power solution

- Excellent fuel economy and low heat rejection, allowing customers to use a more compact cooling group
- The new common rail fuel system delivers world-class robustness and packaged with the new filtration system, excellent tolerance to the different fuel qualities around the world. These fuels include aviation and biofuel (using biofuel that complies with Perkins standards). Options are available to meet local market needs

Lower installation costs

- The Perkins 1104D-E44T maintains the same package size and variety of hook-up points as the current 1104C-E44T and 1104C-44T platforms. This commonality reduces the cost impact for the customer during the changeover process

Lower operating costs

- The 1104D maintains Stage II / Tier 2 fuel economy. This will allow many customers to keep existing fuel tanks, avoiding the need for costly redesign
- Service intervals are set at 500 hours as standard
- **Warranties and Service Contracts**
We provide two-year warranties for variable speed models, as standard. These are supported by multilevel Extended Service Contracts that can be bought additionally
Discover more: www.perkins.esc
- A low usage warranty package is also available

Long-term power solution

- The 1104D range has been designed to fully comply with stringent Stage IIIA / Tier 3 emissions regulations, providing an emissions compliant power solution for the future

Product support

- With highly trained Perkins distributors in thousands of communities in over 180 countries, you are never far away from expert product knowledge, genuine parts and a range of advanced diagnostic technology for keeping your engine in peak condition
- To find your local distributor: www.perkins.com/distributor

www.perkins.com

Photographs are for illustrative purposes only and may not reflect final specification.
All information in this document is substantially correct at time of printing and may be altered subsequently.
Final weight and dimensions will depend on completed specification.

Publication No. PN3052/11/15 Produced in England ©2014 Perkins Engines Company Limited

 **Perkins**[®]

THE HEART OF EVERY GREAT MACHINE

1100 Series 1104D-E44T Industrial

74.5 kW / 99.9 hp

Technical information

- Engine ratings
- SAE B PTO Drive
- Timing case and gear driven auxiliaries
- Flywheel housings
- Flywheel and starter rings
- Oil filter positions
- Starter motors
- Fan drives and locations
- Lubricating oil filters and breathers
- Front-end drives
- Alternators
- Belt driven auxiliaries
- Induction manifolds
- Exhaust manifolds
- Fuel filter positions
- Cold start aids
- Engine mountings
- Power and torque curve tailoring
- Cooling packs
- Control panel
- Air compressor

www.perkins.com

Photographs are for illustrative purposes only and may not reflect final specification.
All information in this document is substantially correct at time of printing and may be altered subsequently.
Final weight and dimensions will depend on completed specification.


Publication No. PN3052/11/15 Produced in England ©2014 Perkins Engines Company Limited

 **Perkins**[®]

THE HEART OF EVERY GREAT MACHINE

1100 Series 1104D-E44T Industrial

74.5 kW / 99.9 hp

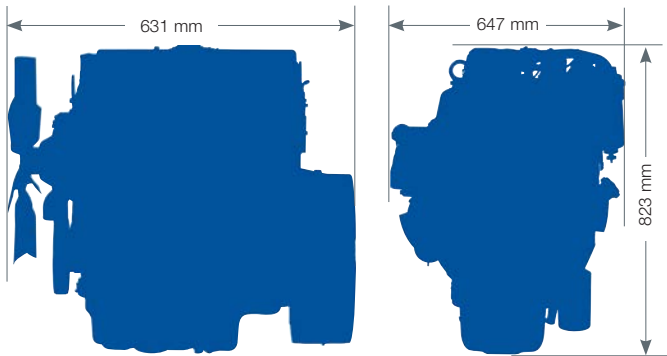

Engine package weights and dimensions		
Length	631 mm	24.8 in
Width	647 mm	25.4 in
Height	823 mm	32.4 in
Weight (dry)	360 kg	794 lb

www.perkins.com

Photographs are for illustrative purposes only and may not reflect final specification.
All information in this document is substantially correct at time of printing and may be altered subsequently.
Final weight and dimensions will depend on completed specification.

Publication No. PN3052/11/15 Produced in England ©2014 Perkins Engines Company Limited

 **Perkins**[®]

THE HEART OF EVERY GREAT MACHINE

1100 Series 1104D-E44T Industrial

74.5 kW / 99.9 hp

Speed rpm	Power kW	Power hp	Speed rpm	Torque Nm	Torque lbf-ft	Rating type
2200	74.5	99.9	1400	420	309.7	C

Power for a run-in engine after 60 hours

Net Intermittent = Intermittent service where maximum power and/or are, cyclic (time at full load not to exceed 50%)

Rating standard ISO/TR 14396

www.perkins.com

Photographs are for illustrative purposes only and may not reflect final specification.
All information in this document is substantially correct at time of printing and may be altered subsequently.
Final weight and dimensions will depend on completed specification.

Publication No. PN3052/11/15 Produced in England ©2014 Perkins Engines Company Limited

 **Perkins**[®]

THE HEART OF EVERY GREAT MACHINE